

Superior Essex Optical Fiber Data Cable

RISER RATED



All Superior Essex riser optical fiber data cables including single mode and multimode fiber



At Superior Essex we believe that the technology that interconnects the world should also respect it. Cabling that is manufactured sustainably in a third-party certified zero waste to landfill facility as well as a facility that has reduced their Scope 1 and Scope 2 carbon emissions by 21% since 2011 is just the start. We take pride in the transparency of our total life cycle impacts through our environmental product declaration efforts and are working diligently to not only be transparent about our impacts but also reducing these impacts for the betterment of today and to the future, tomorrow.





ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL Environment 333 Pfingsten Road Northbrook, IL 60061 https://www.ul.com/ https://spot.ul.com
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	General Program Instructions v.2.4 July 2018
MANUFACTURER NAME AND ADDRESS	Superior Essex Inc. 5770 Powers Ferry Rd NW Atlanta, GA 30327
DECLARATION NUMBER	4789047039.104.1
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	Superior Essex Optical Fiber Data Cable-Riser Rated; 1m
REFERENCE PCR AND VERSION NUMBER	P.E.P Association. PCR for Electrical, Electronic and HVAC-R Products (2015) P.E.P Association. PSR Specific Rules for Wires, Cables and Accessories (2015)
DESCRIPTION OF PRODUCT APPLICATION/USE	Eight premises fiber optic cable products are covered in this declaration. Riser cables are installed in non-plenum spaces of buildings and must meet associated fire safety test standards.
PRODUCT RSL DESCRIPTION (IF APPL.)	5 years with a 100% use rate
MARKETS OF APPLICABILITY	North America
DATE OF ISSUE	October 1, 2020
PERIOD OF VALIDITY	5 Years
EPD TYPE	Product-Specific
RANGE OF DATASET VARIABILITY	N/A
EPD SCOPE	Cradle to grave
YEAR(S) OF REPORTED PRIMARY DATA	2018
LCA SOFTWARE & VERSION NUMBER	GaBi 9
LCI DATABASE(S) & VERSION NUMBER	GaBi 2019 LCI database (Service Pack 39)
LCIA METHODOLOGY & VERSION NUMBER	CML-IA, version 2016

This PCR review was conducted by:	PEP ecopassport Program
	PCR Review Committee
This declaration was independently verified in accordance with ISO 14025: 2006. <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	
	Grant R. Martin, UL Environment
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	
	Thomas P. Gloria, Industrial Ecology Consultants

LIMITATIONS

Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

Accuracy of Results: EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

Comparability: EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series



According to ISO 14025

1. Product Definition and Information

Description of Company/Organization

Superior Essex is a global leader in the design, manufacture and supply of wire and cable products. This declaration is presented as we develop our product stewardship program to evaluate and reduce the impacts of products and processes throughout the corporation and business groups.

Product Description

Eight premises fiber optic cable products are covered in this declaration. Riser cables are installed in non-plenum spaces of buildings and must meet associated fire safety test standards. All products listed below are UL Listed ONFR or OFCR. Most of these products are cut to custom lengths and shipped on reels.

3 mm Microarray Breakout Part Number: P3 Series

The 3 mm Microarray Breakout cable from Superior Essex is designed for high performance in a small package. The premises loose tube design consists of 3 mm microarray interconnect cable subunits, each of which contain either eight or twelve 250 micron fibers. The aramid yarns inside the subunit allow the subunit to be crimped directly onto an MTP®/MPO connector. The 3 mm subunits are stranded around a central strength element that is both flexible and robust enough to pass backbone installation requirements. The stranded subunits are held to the strength element core by binder yarns and/or tapes ensuring excellent temperature performance. Finally, a RoHS-compliant flexible jacket protects the core from the rigors of installation while providing riser or plenum fire protection. The cable is available with TeraFlex® single mode, and laser-optimized 50/125 micron 10G/150 (OM2+), 10G/300 (OM3) and 10G/550 (OM4) multimode fiber types.

Compact and Rugged Indoor MDU Part Number: D3 Series

Both the Compact MDU 2.9 mm simplex cable and the Rugged Indoor MDU 4.8 mm simplex cable meet ICEA-730 Draft specification for MDU cables. The 2.9 mm is ideal for low-stress installations where space is a premium. The 4.8 mm is more robust and can handle installation tensions as high as 100 pounds. Both cables are available with G.657.B3 compliant bend resistant single mode fiber, preventing light loss even under tight bends.

Rugged Indoor/Outdoor MDU Part Number: D5 Series

The Rugged Indoor/Outdoor MDU is a 4.8 mm simplex cable that meets ICEA-730 specification for MDU cables. The cable is robust and can handle installation tensions as high as 100 pounds. The black jacket is UL® Listed Sunlight Resistant and the cable design employs dry block technology to prevent water penetration without the use of gels. This cable is available with G.657.B3 compliant bend resistant single mode fiber, preventing light loss even under tight bends.

Dry Block, Sunlight Resistant, Indoor/Outdoor, Tight Buffer Part Number: W3 Series

The Dry Block, Sunlight Resistant Indoor/Outdoor, Tight Buffer Riser-Rated Cable line offers the system designer the ultimate in premises optical fiber cable utility. These cables can be installed in open spaces, trays, conduits, inner-ducts, trenches, steam tunnels and building riser locations. These cables incorporate the latest in dry water-blocking technology. This system of water blocking eliminates the need to clean off the traditional gel-based water-blocking compounds found in loose tube cables. In addition, breakout kits and or other special termination equipment associated with loose tube Outside Plant (OSP) cables are not required. The outer jacket is comprised of a durable UL® Listed Sunlight Resistant, black polymer that allows for the cable to be exposed to longterm direct sunlight without the concern of material degradation. All fiber types are available, including 50/125 µm, 62.5/125 µm and single mode.



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series



According to ISO 14025

Indoor/Outdoor, Interlock Armored, Tight Buffer Part Number: L3 Series

Interlock Armored Optical Fiber Cables provide an extremely well protected cable package ideally suited for harsh environments. The armor is available in aluminum and comes with either an OFCR (riser) or OFCP (plenum) rating. This design offers the system designer a product that can be installed in areas where added mechanical protection and security are required. The flexible interlock armored cable design is also popular for retrofit applications and eliminates the need to install rigid conduit while still meeting building code guide.

Multi-Unit Distribution Part Number: 43 Series

Premises Multi-unit Distribution Optical Fiber Cables are constructed using 6 or 12-fiber subunits stranded around a central strength member in a RoHS-compliant design for fiber counts from 18 through 144. Standard fibers for these cables include Reduced Water Peak (RWP) single mode, TeraGain® 220/600 62.5 µm multimode and TeraFlex® 10G/150 – laser optimized 50 µm multimode fiber. All fibers exceed industry requirements. The design consists of flexible 900 µm tight buffered industry standard 250 µm fibers (900/250/125 µm) and is suitable for use with standard connectors, like the SC, ST, and FC, and small-form-factor connectors like the LC. Subunits are constructed using dielectric aramid yarns for strength while maintaining flexibility and are jacketed using the color appropriate to the type of fiber in the cable. The subunits are then stranded around a flexible high-strength glass reinforced rod which provides exceptional resistance to dimensional changes due to temperature. A durable, flame resistant outer jacket is applied over the cable core using appropriate OFNR or OFNP rated materials.

Single Unit Distribution Part Number: 43 Single Unit

These Superior Essex premises distribution optical fiber cables are constructed using a single unit, single jacket RoHS-compliant design with fiber counts from 6 through 24. The design consists of flexible 900 µm tight buffered industry standard 250 µm fibers (900/250/125 µm) and is suitable for use with standard connectors, like the SC, ST, and FC, and small-form-factor connectors like the LC. Dielectric aramid yarns are applied for strength while maintaining flexibility. The 18 and 24-fiber cable designs have a flexible glass reinforced central strength element for added durability and performance. A durable, flame resistant outer jacket is applied over the cable core using appropriate OFNR or OFNP rated materials.

Simplex, Duplex and Quad Interconnect Part Number: 33 Series

Simplex, Duplex and Quad Optical Fiber Interconnect Cables are typically used for patch cords and intrabuilding installations. Superior Essex designed these cables for environments where small size, flexible construction and flame resistance are required. These cables are available in both riser and plenum versions. Higher performance optical fibers are offered, including bend insensitive G.657.A1 single mode and 10G/300 OM3 and 10G/550 OM4 laser optimized 50 µm multimode. The design consists of flexible tight buffer material extruded over the fiber to a diameter of 900 µm for use with standard connectors. Dielectric yarns are applied for additional strength and a flame retardant PVC jacket covers the strength members. Appropriate materials are used to achieve an OFNR (riser) or OFNP (plenum) rating. Standard 2.9 mm and small form factor 2 mm diameters are available for simplex and duplex designs.

Application

The products listed are used in the non-plenum spaces of buildings. Applications for the riser products include 10BASE-T through 100GBASE-T Ethernet.

Material Composition

The raw material and packaging inputs for the riser fiber optic cables are listed in Table 1.

Table 1: Material Inputs (including packaging) for Riser Fiber Optic Cables [kg / meter]

	33 Series	P3 Series	43 Single Unit	43 Series	D3 Series	D5 Series	W3 Series	L3 Series
Fiber	2.90E-04	2.56E-02	9.00E-03	3.87E-02	7.26E-05	7.26E-05	3.87E-02	3.87E-02
Aramid yarn	1.72E-03	1.15E-02	3.28E-03	2.31E-02	1.72E-03	1.78E-03	2.32E-02	2.32E-02



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

	33 Series	P3 Series	43 Single Unit	43 Series	D3 Series	D5 Series	W3 Series	L3 Series
Ink	2.54E-05	9.21E-04	1.52E-04	9.23E-04	6.35E-06	6.35E-06	9.23E-04	9.23E-04
Aluminum	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.37E-01
PET	0.00E+00	2.01E-03	0.00E+00	7.60E-03	0.00E+00	0.00E+00	1.33E-02	1.33E-02
PVDF	0.00E+00	0.00E+00	0.00E+00	7.60E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PVC	1.92E-02	6.82E-02	5.76E-02	1.08E-01	7.43E-04	1.59E-02	2.60E-01	4.63E-01
Pkg - Cardboard	2.23E-07	3.13E-07	1.64E-06	1.64E-06	5.36E-06	1.93E-07	3.72E-06	7.14E-06
Pkg - HDPE	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.00E+00	1.00E+00
Pkg - Polystyrene	1.93E-07	2.68E-07	1.41E-06	1.41E-06	4.61E-06	1.79E-07	3.27E-06	6.25E-06
Pkg - Polypropylene	1.13E-07	1.49E-07	8.18E-07	8.18E-07	2.68E-06	9.82E-08	1.93E-06	3.57E-06
Pkg - Wood	1.37E-03	1.93E-03	9.82E-03	9.82E-03	3.27E-02	1.19E-03	2.23E-02	4.32E-02
Total	2.26E-02	1.10E-01	7.99E-02	1.96E-01	3.53E-02	1.89E-02	1.36E+00	1.82E+00



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series



According to ISO 14025

Manufacturing

The first step in the process is the inspection and testing of optical fibers as Superior Essex does not manufacture its own optical fibers. The clear glass fibers are then either colored via UV inking or, for tight buffered cable products, a colored PVC coating is applied by passing the raw glass fiber through the heated buffer and into a water-cooling trough. The buffered cable leaves the cooling trough and passes through an air wipe to remove excess moisture as it is wound onto another coil.

All types of fiber then require some form of sheathing process. At this step, fibers are automatically fed through an extruder. The sheathed fiber is then passed through a water-cooling trough that slowly cools and hardens the tube and is rolled onto another reel. In tight buffered sheathing processes, cables are fed into an extruder along with special strength yarns. A fire-retardant plastic material is extruded to form the protective tube around the fibers and is then cooled in a water trough.

Depending on the number of fibers required, multiple tubes of fiber may be combined through fiber stranding. Cable spools, along with strength members, tape, yarns, and armoring materials (if applicable based on the intended use of the cable) are fed into an electric stranding machine where the internal contents of the cable are assembled together. The cable spools are then fed into a jacketing machine, where jacket material is extruded onto the stranded cable. This is followed immediately by a printer that prints length and other information onto the jacketed cable, then by another cooling trough, and finally by winding the cable onto a spool for packaging. Final product is generally shipped via plywood reels and is cut to custom lengths per customer order.

ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

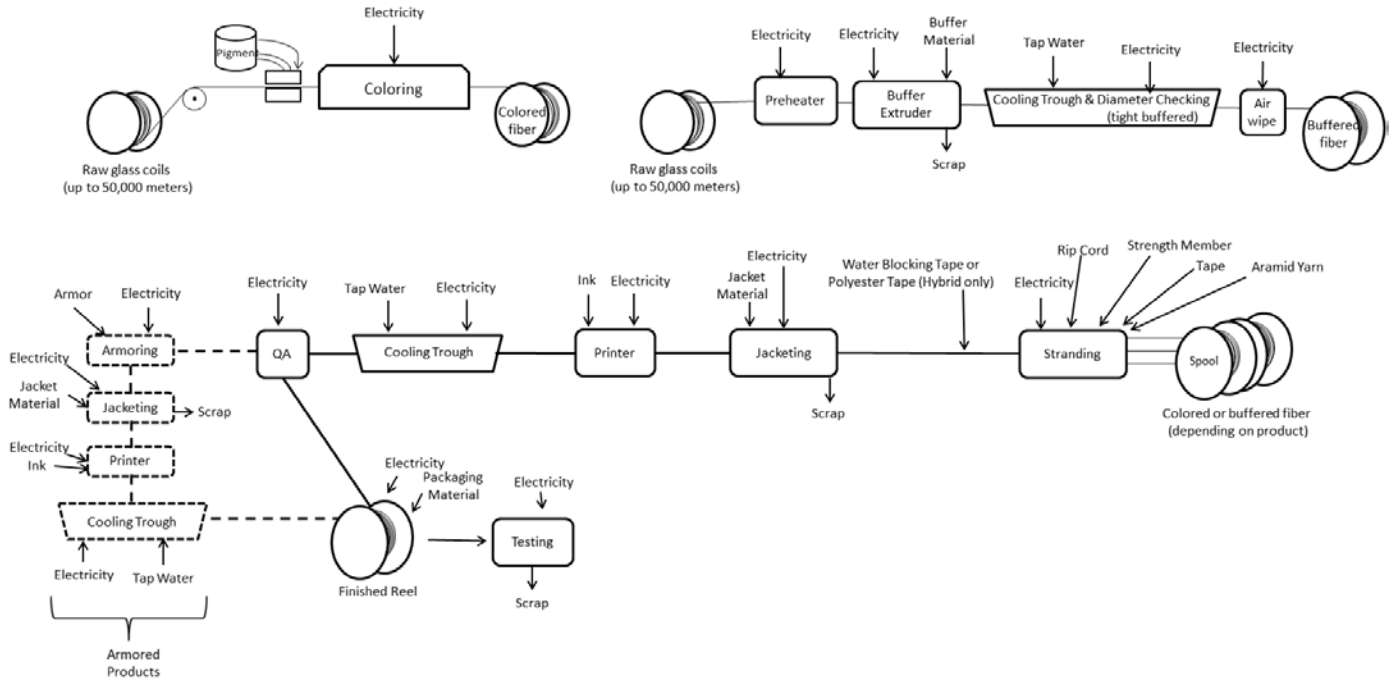


Figure 1: Manufacturing Process Flow of Riser Fiber Data Cable



Figure 2: Photographs of Manufacturing Process



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

2. Life Cycle Assessment Background Information

Functional Unit

The functional unit for the study is defined as required by the PEP PSR for Wire, Cable, and Accessories, Product Specific Rules and PEP-PCR-ed3-EN-2015 04 02 as:

*To transmit a communication signal on **1 meter**, according to the protocol and category relevant to each cable (outlined below), for a period of **5 years** with a **100% use rate**.*

The fiber products assessed in this study are designed as single-mode or multimode cables; the main difference between the two is that the latter has much larger core diameter. Single-mode and multimode cables each follow their own set of protocols, as seen below in Table 2.

Table 2: Single-mode and Multimode Protocols

Cable type	Protocol
Multimode	10GBASE-SR
	1000BASE-SX
	10BASE-FL
Single mode	100BASE-LX
	1000BASE-LX
	10GBASE-LR

Cable mode type for each cable product is listed in Table 3.

Table 3: Mode Type for each Cable

Product name	Single or Multimode
33 Series	Multimode
P3 Series	Single mode
43 Single Unit	Multimode
43 Series	Multimode
D3 Series	Single mode
D5 Series	Single mode
W3 Series	Multimode
L3 Series	Single mode

System Boundary

This project considers the life cycle stages from resource extraction through installation and end-of-life. The system boundary covers raw material acquisition, manufacturing, marketing, use and waste disposal as seen in Figure 3.



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

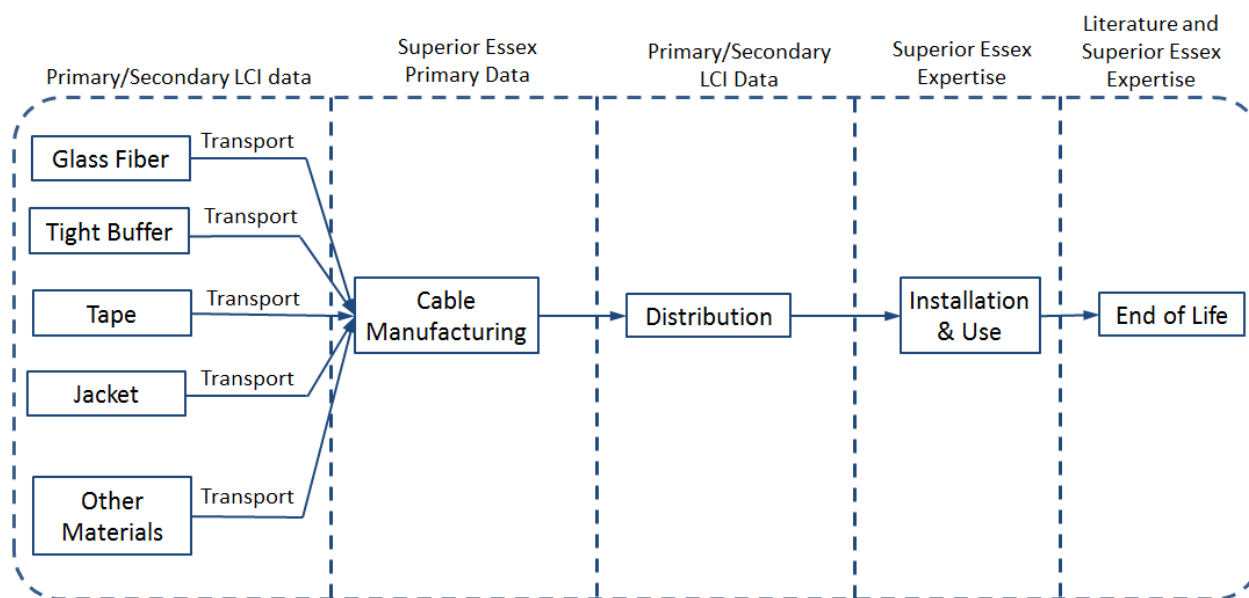


Figure 3: System Boundary

Cut-off Criteria

All known data, including packaging of the finished product, were included in the analysis. The one exception was energy consumed by installation test equipment, which is estimated to be negligible. Capital goods and infrastructure required to produce and install the cables were excluded.

Period under Review

The data represent the production of fiber cable at Superior Essex facilities from calendar year 2018.

Allocation

Allocation for manufacturing energy was conducted based on production mass and then multiplied by the product weight per hundred feet. Water and waste items were allocated per length of product.

Software and Background Data

The LCA model was created using the GaBi 9 Software system for life cycle engineering, developed by Sphera. The GaBi 2019 LCI database (Service Pack 39) provides the life cycle inventory data for several of the raw and process materials obtained from the background system.

Transportation

Superior Essex provided resource transportation mode and distance data to support the modeling of raw material inbound transportation. Finished products were modelled as being shipped 953 miles by truck. This calculated average was based on Superior Essex sales data as part of the company's 2014 EPDs; the same assumption is still representative for current data as Superior Essex has not seen dramatic changes in the makeup or locations of their customers.



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

Installation and Use Stage

Superior Essex fiber optic riser cable products are distributed globally, but primarily throughout the United States and Canada. An average installation scrap rate of 5% was assumed in this study, as determined by interviews with installers and the expertise of Superior Essex. Installers routinely use battery-powered signal testing devices (a popular brand name is Fluke) during installation to ensure cables have been installed properly. The electricity consumed (based on calculations from the specifications of a late model Fluke device) is negligible compared to the rest of the installation or life cycle impacts and therefore was excluded from the study as allowed by the PCR's cut-off criteria.

The lifetime of the product is widely variable. Products are most often replaced not due to performance degradation, but due to improvements in technology over time, for which corresponding increases in bandwidth and data speeds are demanded by building tenants. Since the product is usually installed in a well-protected and undisturbed part of a building, the cable can continue to function throughout the life of the building. Fiber optic cable is a passive product after installation and during the use stage. The product consumes very little energy and requires no maintenance over its 5 year service life; power loss assumptions for multimode and single mode cables are shown below in Table 4.

Table 4: Fiber cable power loss

Cable type	Protocol	Power loss ($\mu\text{W}/\text{m}$)
Multimode	10GBASE-SR	0.76
	1000BASE-SX	
	10BASE-FL	
Single mode	100BASE-LX	0.09
	1000BASE-LX	
	10GBASE-LR	

End-of-Life

In conformance with the PEP PCR, this study assumes that metal components of fiber cables are separated and recycled at the end of life with all remaining materials being disposed as the average US municipal solid waste disposition. The average US disposition includes 82% landfill and 18% incineration.

ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

3. Life Cycle Assessment Results

Life Cycle Impact Assessment Results

The potential environmental impacts listed below were assessed throughout the life cycle of the plenum data cable products as defined above, per one meter of cable. The environmental impacts were analyzed using CML methodology. In **Error! Reference source not found.** below, the following abbreviations have been used for the impact categories:

- GWP – Global Warming Potential
- AP – Acidification Potential
- EP – Eutrophication Potential
- ODP – Ozone Depletion Potential
- POCP – Photochemical Ozone Creation Potential
- ADPe – Abiotic Depletion Potential – Elements
- PED – Primary Energy Demand

Table 5: Cradle-to-Grave Life Cycle Impact Assessment Results per 1 meter of Cable

Impact Category	Unit	33 Series					P3 Series				
		Mfg	Distribution	Installation	Use	EoL	Mfg	Distribution	Installation	Use	EoL
GWP	kg CO ₂ -eq.	3.45E-01	3.47E-03	2.04E-02	1.95E-05	3.64E-03	1.56E+00	1.69E-02	8.73E-02	2.31E-06	1.84E-02
AP	kg SO ₂ -eq.	6.01E-04	8.35E-06	3.61E-05	5.82E-08	1.03E-05	2.77E-03	4.07E-05	1.57E-04	6.89E-09	5.22E-05
EP	kg PO ₄ ³⁻ -eq.	1.42E-04	2.38E-06	8.48E-06	3.17E-09	1.94E-06	3.64E-04	1.16E-05	2.16E-05	3.76E-10	9.85E-06
ODP	kg R11-eq.	3.69E-12	3.49E-19	1.94E-13	6.40E-20	5.47E-18	1.36E-11	1.70E-18	7.15E-13	7.57E-21	2.77E-17
POCP	kg C ₂ H ₄ -eq.	5.46E-05	-2.47E-06	3.48E-06	3.52E-09	-1.09E-06	2.31E-04	-1.20E-05	1.26E-05	4.17E-10	-5.55E-06
ADPe	kg Sb-eq.	5.11E+00	5.20E-02	2.77E-01	2.43E-04	5.17E-02	2.32E+01	2.53E-01	1.25E+00	2.88E-05	2.62E-01
PED	MJ	5.65E+00	5.23E-02	3.06E-01	3.11E-04	5.42E-02	2.58E+01	2.55E-01	1.39E+00	3.69E-05	2.75E-01
Net Water Use	m ³	3.73E-03	6.27E-06	1.97E-04	1.09E-07	8.57E-06	7.07E-03	3.06E-05	3.77E-04	1.29E-08	4.34E-05
Air Pollution	m ³	1.64E+01	1.55E-01	1.45E+00	9.66E-04	1.93E-01	6.99E+01	7.56E-01	4.73E+00	1.14E-04	9.79E-01
Water Pollution	m ³	2.17E-01	1.94E-03	1.17E-02	4.72E-06	1.55E-03	9.80E-01	9.45E-03	5.26E-02	5.59E-07	7.86E-03

Impact Category	Unit	43 Single Unit					43 Series				
		Mfg	Distribution	Installation	Use	EoL	Mfg	Distribution	Installation	Use	EoL
GWP	kg CO ₂ -eq.	1.03E+00	1.23E-02	6.95E-02	1.95E-05	1.20E-02	2.54E+00	2.89E-02	1.51E-01	1.95E-05	3.04E-02
AP	kg SO ₂ -eq.	1.79E-03	2.95E-05	1.24E-04	5.82E-08	3.39E-05	4.48E-03	6.95E-05	2.71E-04	5.82E-08	8.60E-05
EP	kg PO ₄ ³⁻ -eq.	2.66E-04	8.43E-06	2.06E-05	3.17E-09	6.39E-06	5.48E-04	1.99E-05	3.68E-05	3.17E-09	1.62E-05
ODP	kg R11-eq.	1.12E-11	1.23E-18	5.88E-13	6.40E-20	1.80E-17	2.13E-11	2.91E-18	1.12E-12	6.40E-20	4.57E-17
POCP	kg C ₂ H ₄ -eq.	1.57E-04	-8.73E-06	1.36E-05	3.52E-09	-3.60E-06	3.75E-04	-2.06E-05	2.44E-05	3.52E-09	-9.15E-06
ADPe	kg Sb-eq.	1.55E+01	1.84E-01	8.55E-01	2.43E-04	1.70E-01	3.80E+01	4.33E-01	2.07E+00	2.43E-04	4.32E-01
PED	MJ	1.72E+01	1.85E-01	9.46E-01	3.11E-04	1.78E-01	4.23E+01	4.35E-01	2.29E+00	3.11E-04	4.53E-01
Net Water Use	m ³	5.66E-03	2.22E-05	3.05E-04	1.09E-07	2.82E-05	9.75E-03	5.22E-05	5.24E-04	1.09E-07	7.16E-05
Air Pollution	m ³	4.71E+01	5.48E-01	6.81E+00	9.66E-04	6.36E-01	1.13E+02	1.29E+00	1.05E+01	9.66E-04	1.61E+00
Water Pollution	m ³	6.63E-01	6.85E-03	3.63E-02	4.72E-06	5.10E-03	1.60E+00	1.61E-02	8.64E-02	4.72E-06	1.30E-02



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

Impact Category	Unit	D3 Series					D5 Series				
		Mfg	Distribution	Installation	Use	EoL	Mfg	Distribution	Installation	Use	EoL
GWP	kg CO ₂ -eq.	5.17E-02	5.42E-03	4.99E-02	2.31E-06	4.34E-04	2.95E-01	2.90E-03	1.74E-02	2.31E-06	3.04E-03
AP	kg SO ₂ -eq.	2.42E-04	1.30E-05	1.01E-04	6.89E-09	1.23E-06	5.19E-04	6.98E-06	3.11E-05	6.89E-09	8.60E-06
EP	kg PO ₄ ³⁻ -eq.	1.05E-04	3.72E-06	2.52E-05	3.76E-10	2.32E-07	1.33E-04	1.99E-06	7.86E-06	3.76E-10	1.62E-06
ODP	kg R11-eq.	3.80E-13	5.45E-19	2.00E-14	7.57E-21	6.52E-19	3.04E-12	2.92E-19	1.60E-13	7.57E-21	4.57E-18
POCP	kg C ₂ H ₄ -eq.	2.23E-05	-3.86E-06	2.10E-05	4.17E-10	-1.31E-07	4.72E-05	-2.07E-06	3.00E-06	4.17E-10	-9.15E-07
ADPe	kg Sb-eq.	1.20E+00	8.12E-02	1.40E-01	2.88E-05	6.17E-03	4.35E+00	4.34E-02	2.36E-01	2.88E-05	4.32E-02
PED	MJ	1.30E+00	8.16E-02	1.46E-01	3.69E-05	6.47E-03	4.81E+00	4.37E-02	2.60E-01	3.69E-05	4.53E-02
Net Water Use	m ³	3.00E-03	9.79E-06	1.72E-04	1.29E-08	1.02E-06	3.58E-03	5.24E-06	1.90E-04	1.29E-08	7.16E-06
Air Pollution	m ³	7.69E+00	2.42E-01	1.47E+01	1.14E-04	2.30E-02	1.42E+01	1.30E-01	1.24E+00	1.14E-04	1.61E-01
Water Pollution	m ³	5.63E-02	3.03E-03	5.78E-03	5.59E-07	1.85E-04	1.85E-01	1.62E-03	9.96E-03	5.59E-07	1.30E-03

Impact Category	Unit	W3 Series					L3 Series				
		Mfg	Distribution	Installation	Use	EoL	Mfg	Distribution	Installation	Use	EoL
GWP	kg CO ₂ -eq.	7.97E+00	2.09E-01	6.17E-01	1.95E-05	5.76E-02	1.50E+01	2.79E-01	1.02E+00	2.31E-06	1.33E-01
AP	kg SO ₂ -eq.	1.35E-02	5.02E-04	1.23E-03	5.82E-08	1.63E-04	3.14E-02	6.72E-04	2.25E-03	6.89E-09	3.75E-04
EP	kg PO ₄ ³⁻ -eq.	1.71E-03	1.43E-04	2.04E-04	3.17E-09	3.07E-05	3.05E-03	1.92E-04	2.91E-04	3.76E-10	7.08E-05
ODP	kg R11-eq.	5.04E-11	2.10E-17	2.65E-12	6.40E-20	8.65E-17	1.88E-10	2.81E-17	9.87E-12	7.57E-21	1.99E-16
POCP	kg C ₂ H ₄ -eq.	1.45E-03	-1.49E-04	2.20E-05	3.52E-09	-1.73E-05	2.64E-03	-1.99E-04	9.39E-05	4.17E-10	-3.99E-05
ADPe	kg Sb-eq.	1.60E+02	3.12E+00	1.09E+01	2.43E-04	8.18E-01	2.56E+02	4.18E+00	1.61E+01	2.88E-05	1.88E+00
PED	MJ	1.72E+02	3.14E+00	1.15E+01	3.11E-04	8.58E-01	2.77E+02	4.21E+00	1.72E+01	3.69E-05	1.98E+00
Net Water Use	m ³	3.06E-02	3.77E-04	1.91E-03	1.09E-07	1.36E-04	7.93E-02	5.04E-04	4.50E-03	1.29E-08	3.12E-04
Air Pollution	m ³	4.22E+02	9.32E+00	4.07E+01	9.66E-04	3.06E+00	8.49E+02	1.25E+01	7.27E+01	1.14E-04	7.04E+00
Water Pollution	m ³	4.15E+00	1.17E-01	2.98E-01	4.72E-06	2.45E-02	9.95E+00	1.56E-01	6.08E-01	5.59E-07	5.65E-02

Life Cycle Impact Inventory Results

In the table below, the following abbreviations (per EN 15804) have been used for the Inventory metrics:

- PERT = Primary Energy Renewable Total
- PENRT = Primary Energy Non-Renewable Total
- FW = Fresh Water
- HWD = Hazardous Waste Disposed
- NHWD = Non Hazardous Waste Disposed
- RWD = Recycled Waste Disposed

Table 6: Inventory Metrics per 1 meter of Cable

Impact Category	Unit	33 Series					P3 Series				
		Mfg	Distribution	Installation	Use	EoL	Mfg	Distribution	Installation	Use	EoL
PERT	MJ	6.41E-01	1.62E-03	3.41E-02	4.26E-05	3.31E-03	3.02E+00	7.88E-03	1.60E-01	5.05E-06	1.68E-02



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series

According to ISO 14025

PENRT	MJ	5.65E+00	5.23E-02	3.06E-01	3.11E-04	5.42E-02	2.58E+01	2.55E-01	1.39E+00	3.69E-05	2.75E-01
FW	m ³	3.73E-03	6.27E-06	1.97E-04	1.09E-07	8.57E-06	7.07E-03	3.06E-05	3.77E-04	1.29E-08	4.34E-05
HWD	kg	2.78E-08	4.24E-10	1.52E-09	1.37E-13	3.02E-10	1.86E-07	2.07E-09	1.00E-08	1.62E-14	1.53E-09
NHWD	kg	4.11E-01	1.97E-06	2.37E-02	9.79E-08	2.14E-02	4.24E-01	9.60E-06	2.95E-02	1.16E-08	1.08E-01
RWD	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Impact Category	Unit	43 Single Unit					43 Series				
		Mfg	Distribution	Installation	Use	EoL	Mfg	Distribution	Installation	Use	EoL
PERT	MJ	2.07E+00	5.72E-03	1.11E-01	4.26E-05	1.09E-02	5.03E+00	1.35E-02	2.68E-01	4.26E-05	2.77E-02
PENRT	MJ	1.72E+01	1.85E-01	9.46E-01	3.11E-04	1.78E-01	4.23E+01	4.35E-01	2.29E+00	3.11E-04	4.53E-01
FW	m ³	5.66E-03	2.22E-05	3.05E-04	1.09E-07	2.82E-05	9.75E-03	5.22E-05	5.24E-04	1.09E-07	7.16E-05
HWD	kg	8.99E-08	1.50E-09	5.01E-09	1.37E-13	9.93E-10	2.38E-07	3.53E-09	1.30E-08	1.37E-13	2.52E-09
NHWD	kg	4.17E-01	6.96E-06	3.25E-02	9.79E-08	7.03E-02	4.30E-01	1.64E-05	3.91E-02	9.79E-08	1.79E-01
RWD	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Impact Category	Unit	D3 Series					D5 Series				
		Mfg	Distribution	Installation	Use	EoL	Mfg	Distribution	Installation	Use	EoL
PERT	MJ	4.89E-01	2.53E-03	2.93E-02	5.05E-06	3.95E-04	5.43E-01	1.35E-03	2.89E-02	5.05E-06	2.77E-03
PENRT	MJ	1.30E+00	8.16E-02	1.46E-01	3.69E-05	6.47E-03	4.81E+00	4.37E-02	2.60E-01	3.69E-05	4.53E-02
FW	m ³	3.00E-03	9.79E-06	1.72E-04	1.29E-08	1.02E-06	3.58E-03	5.24E-06	1.90E-04	1.29E-08	7.16E-06
HWD	kg	3.64E-09	6.62E-10	7.10E-10	1.62E-14	3.60E-11	2.17E-08	3.54E-10	1.19E-09	1.62E-14	2.52E-10
NHWD	kg	4.12E-01	3.08E-06	4.46E-02	1.16E-08	2.55E-03	4.10E-01	1.65E-06	2.33E-02	1.16E-08	1.79E-02
RWD	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Impact Category	Unit	W3 Series					L3 Series				
		Mfg	Distribution	Installation	Use	EoL	Mfg	Distribution	Installation	Use	EoL
PERT	MJ	1.17E+01	9.72E-02	7.29E-01	4.26E-05	5.24E-02	3.06E+01	1.30E-01	1.73E+00	5.05E-06	1.21E-01
PENRT	MJ	1.72E+02	3.14E+00	1.15E+01	3.11E-04	8.58E-01	2.77E+02	4.21E+00	1.72E+01	3.69E-05	1.98E+00
FW	m ³	3.06E-02	3.77E-04	1.91E-03	1.09E-07	1.36E-04	7.93E-02	5.04E-04	4.50E-03	1.29E-08	3.12E-04
HWD	kg	4.61E-07	2.55E-08	4.09E-08	1.37E-13	4.77E-09	2.84E-03	3.41E-08	1.49E-04	1.62E-14	1.10E-08
NHWD	kg	4.55E-01	1.18E-04	1.11E+00	9.79E-08	3.38E-01	9.28E-01	1.59E-04	1.18E+00	1.16E-08	7.78E-01
RWD	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.37E-01



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series



According to ISO 14025

4. Optional Environmental Information

Organizational Third-Party Certification

A third-party audit was conducted by GreenCircle Certified, LLC for the hazardous and non-hazardous waste streams. The audit verified that the Brownwood, TX facility is a Zero Waste to Landfill facility during this study's reference period.



5. References

- ISO/IEC 11801-1 *Information Technology – Generic Cabling for Customer Premises – Part 1: General Requirements*
- C22.2 NO. 214-08 (R2013) - Communications cables (Bi-national standard, with UL 444)
- EN 15804:2012 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products
- EPA, Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI)
- EPA, Wire and Cable Insulation and Jacketing: Life-Cycle Assessments for Selected Applications, June 2008, EPA 744-R-08-001
- FTC Part 260, Green guides
- ISO 14025:2006 *Environmental labels and declarations – Type III environmental declarations – Principles and procedures*
- ISO 14040:2006 *Environmental management - Life cycle assessment – Principles and framework*
- ISO 14044:2006 *Environmental management - Life cycle assessment – Requirements and guidelines*
- ISO 21930:2007 *Sustainability in building construction – Environmental declaration of building products*
- Krieger, T. et al. *New Fire Hazard and Environmental Burden Evaluations of Electrical Cable Installations Utilizing ISO 14040 Environmental Methodologies*. DuPont. November 10, 2007.
- NFPA 70®: National Electrical Code
- P.E.P. Association. *PSR Product Specific Rules for Wires, Cables and Accessories*. PSR-0001-ed3-EN 2015 10 16. 2015.
- P.E.P. Association. *PCR. Product Category Rules for Electrical, Electronic and HVAC-R Products*. PEP-PCR-ed3-EN-2015 04 02. 2015.
- UL 44 Standard Thermoset-Insulated Wires and Cables
- UL 1666 Test for Flame Propagation Height of Electrical and Optical-Fiber Cables Installed Vertically in Shafts
- US EPA Waste Reduction Model (WARM)



ENVIRONMENTAL PRODUCT DECLARATION



Fiber Riser Cable: 33 Series, P3 Series, 43 Single Unit, 43 Series, D3 Series, D5 Series, W3 Series, L3 Series



According to ISO 14025

6. Contact Information

LCA Development

This EPD and corresponding LCA were prepared by Sphera with GaBi Software and data.



Contact Superior Essex

For more information, please visit <http://www.ce.superioressex.com>, or contact Technical Support at Comm.TechSupport@spsx.com or +1 (877) 263-2818.

Superior Essex is located at: 6120 Powers Ferry Road, Suite 150 Atlanta, GA 30339